

Provided by Xpert Survey Equipment
[Click Trimble DiNi for Product Info and Updated Pricing](#)

Key features

Determine accurate height information via a quick and easy key press

Eliminate errors and reduce rework with digital readings

Enjoy effortless data transfer between instrument and office

Measure to a measurement field of just 30 cm

Level 60% faster than with conventional automatic leveling

The Trimble® DiNi® Digital Level is a digital height measurement sensor from Trimble's Integrated Surveying™ portfolio of products. The Trimble DiNi is a field-proven tool designed for any job site where fast and accurate height determination is required. Use the Trimble DiNi for applications such as precise leveling of flat and sloping surfaces, establishing the vertical component of grade and ground profiles, subsidence monitoring, and establishing the vertical component of control networks.

Unparalleled for Performance in the field

The Trimble DiNi is designed to perform optimally every day, whatever your surveying job. It is built rugged—with a dust- and waterproof rating of IP55—to take the tough conditions of the job site in its stride. A backlight in the screen and a light in the circular bubble keep you productive even when daylight gets low.

The DiNi will operate for three days without requiring a battery change, then when it does just recharge it as you would your Trimble GPS system battery...the batteries are the same to ensure convenience and productivity.

When a job is complete, easily transfer data from the instrument to a computer by using a USB storage device; You don't have to carry your instrument in to the office.

easy to learn, easy to Use

The Trimble DiNi Digital Level demands the industry's smallest measurement field—just 30 cm of code rod. So you can measure greater change in height between the level and the rod in one setup, and save time. Additionally, the small measurement area:

- reduces the number of stations needed by up to 20% because the Trimble DiNi is less impacted by a rod hidden by vegetation or hilly terrain.

- makes leveling in low light conditions, for example, in tunnels, easier because only a very small part of the staff needs to be illuminated.
- ensures greater accuracy through less influence of refraction near the ground.

The large graphical display of the Trimble DiNi is also unique, and is complemented by the latest Trimble keyboard for easy operation. Crew members used to operating other Trimble systems will easily adapt to the Trimble DiNi.

trimble Quality and accuracy for measuring with confidence

The Trimble DiNi Digital Level is designed to support the rest of Trimble's Integrated Surveying portfolio. The Trimble DiNi interface is based on Trimble's other advanced and field-proven controllers for easy adoption of the instrument by your crews. Proven Optics by Carl Zeiss ensure the Trimble DiNi offers the highest precision and best resolution.

Measure with confidence, knowing that with the Trimble DiNi Digital Level, your crew will obtain the best quality results with the highest level of productivity.



trimble dini digital level

Performance

accuracyDIN 18723, standard deviation height measuring per 1 km (3280.84 ft) of double leveling

Trimble DiNi 0.3 mm per km

Electronic measurement

Invar precision bar code staff 0.3 mm (0.001 ft)

Standard bar code staff 1.0 mm (0.004 ft)

Visual measurement 1.5 mm (0.005 ft)

Distance measurement with a 20 m (65.62 ft) sighting distance

Invar precision bar code staff20 mm (0.066 ft)

Standard bar code staff25 mm (0.082 ft)

Visual measurements2.0 m (0.656 ft)

Trimble DiNi 0.7 mm per km

Electronic measurement

Invar precision bar code staff 0.7 mm (0.002 ft)

Standard bar code staff 1.3 mm (0.004 ft)

Visual measurement 2.0 mm (0.007 ft)

Distance measurement with a 20 m (65.62 ft) sighting distance

Invar precision bar code staff25 mm (0.082 ft)

Standard bar code staff30 mm (0.098 ft)

Visual measurement0.3 m (0.984 ft)

range

Electronic measurement 1.5m–100m (4.92 ft–328.08 ft)

Visual measurementfrom 1.3m (4.265 ft)

electronic measurement

Trimble DiNi 0.3 mm per km

Electronic measurement

Resolution height measurement 0.01 mm / 0.0001 ft / 0.0001 in

Resolution distance measurement1 mm (0.003 ft)

Measurement time3 s

Trimble DiNi 0.7 mm per km

Electronic measurement

Resolution height measurement 0.1 mm / 0.001 ft / 0.001 in

Resolution distance measurement10 mm (0.033 ft)

Measurement time2 s

horizontal circle

Type of graduation 400 grads and 360 deg

Graduation interval1 grad and 1deg

Estimation to 0.1 grad and 0.1 deg

measurement Programs

Trimble DiNi 0.3 mm per km

Standard programs Single measurement with and without stationing, stakeout, line leveling with intermediate sight and stakeout, line adjustment

Leveling methods¹ BF, BFFB, BFBF, BBFF, FBFF, aBF, aBFFB, aBFBF, aBBFF, aFBFF

Trimble DiNi 0.7 mm per km

Standard programs Single measurement with and without stationing, stakeout, line leveling with intermediate sight and stake out

Leveling methods BF, BFFB, aBF, aBFFB

enVironmental

Operating temperature –20 °C to +50 °C (–4 °F to 122 °F)

Dust- and waterproofing IP55

general sPecification

telescope

Aperture40 mm (0.131 ft)

Field of view at 100 m2.2 m (7.217 ft)

Electronic measurement field0.3 m (0.984 ft)

Magnification

Trimble DiNi 0.3 mm per km 32 x

Trimble DiNi 0.7 mm per km 26 x

compensator

Inclination range±15'

Setting accuracy

Trimble DiNi 0.3 mm per km±0.2"

Trimble DiNi 0.7 mm per km±0.5"

Circular level8/2 mm with illumination

display Graphical, 240 x 160 pixels, monochrome with illumination

Keyboard ... 19-key alpha-numeric and 4-way arrow key for navigation

recording

Internal memory up to 30 000 data lines

External memory USB Flash Drive support

Data transfer USB Interface for data transfer between DiNi and PC (means two way communication)

Real-time clock and temperature sensor

Trimble DiNi 0.3 mm per kmRecording of time or temperature

Trimble DiNi 0.7 mm per kmN.A.

Power supply

Internal battery Li-Ion, 7.4 V / 2.4 Ah

Operating time 3 days working time without illumination


Weight (including battery) 3.5 kg (7.72 lb)



© 2001–2007, Trimble Navigation Limited. All rights reserved. Trimble, the Globe & Triangle logo, and DiNi are trademarks of Trimble Navigation Limited, registered in the United States Patent and Trademark Office and in other countries. Integrated Surveying is a trademark of Trimble Navigation Limited. All other trademarks are the property of their respective owners. PN 022543-327A (02/07)

Footnote 1: F = Foresight, B = Backsight, a = alternating

Certified quality in accordance with DIN ISO 9001/EN 29001. Specifications and descriptions are subject to change without prior notice.

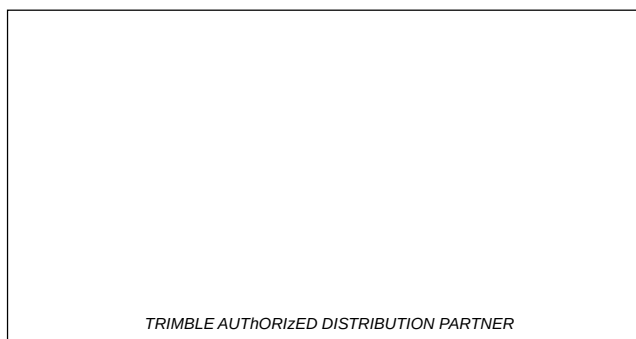

NORTH AMERICA

Trimble Engineering & Construction Group
5475 Kellenburger Road
Dayton, Ohio 45424-1099 • USA
800-538-7800 (Toll Free)
+1-937-245-5154 Phone
+1-937-233-9441 Fax

EUROPE

Trimble GmbH
Am Prime Parc 11
65479 Raunheim • GERMANY
+49-6142-2100-0 Phone
+49-6142-2100-550 Fax

ASIA-PACIFIC

Trimble Navigation Singapore Pty Limited
80 Marine Parade Road
#22-06, Parkway Parade
Singapore 449269 • SINGAPORE
+65-6348-2212 Phone
+65-6348-2232 Fax

